

HRL 12110W_{12 110 /}

HRL12110W -

20%

: 10

Eurobat)

100%

260

(10-12

20°

12 (6

)

110 /

15-

U

-1.67 /

25°

9.9

225A (5

)

8.1

: -15° +50°

: -15° +40°

: -15° +40°

884

25°

13.5 - 13.8

25°

11.0 A (

),

I_{max}

14.4 - 15.0

25°

25°

6-

*

5

ABS (


-

-

)



166±2.0	125±1.5	175±2.0	175±2.0
---------	---------	---------	---------

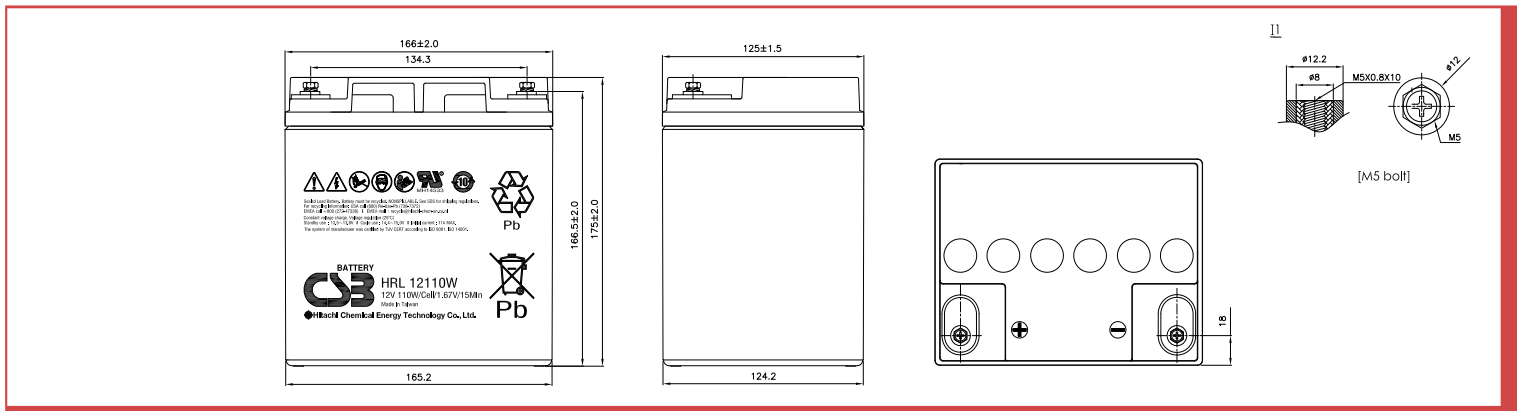

: A (25°)

U _k /T	2	4	5	6	8	10	15	20	30	45	60	90
1.60	170	145	129	118	97.5	81.6	61.4	48.0	33.6	25.7	21.3	14.9
1.67	151	129	117	108	91.1	77.5	59.6	47.0	33.2	25.3	20.8	14.7
1.70	141	121	111	103	88.3	75.7	58.6	46.3	32.7	24.8	20.4	14.5
1.75	125	108	99.6	93.2	82.7	72.2	56.1	44.7	32.3	24.4	20.0	14.4
1.80	109	94.0	88.2	83.7	76.4	68.7	53.7	42.5	31.9	24.0	19.6	14.2
1.85	89.3	78.7	75.9	73.6	69.2	64.4	51.0	40.8	29.7	22.4	18.30	14.0

: / (25°)

U _k /T	2	4	5	6	8	10	15	20	30	45	60	90
1.60	1806	1541	1385	1270	1053	888	682	554	385	297	247	174
1.67	1624	1386	1263	1171	988	852	665	535	377	292	243	173
1.70	1530	1316	1197	1107	956	827	655	526	372	287	239	171
1.75	1358	1190	1093	1020	900	796	636	510	361	280	234	170
1.80	1177	1054	990	941	851	764	610	495	352	274	229	168
1.85	995	918	882	854	793	733	589	478	337	260	217	167