

HRL 12330W₁₂ 350 /

HRL12330W -

20%


: 10 Eurobat
100%



260	(10-12	20°	
12 (6)		
350 /	15-	U	- 1.67 / 25°
29.6			
800A (5)		
3.5			
	: -15°	+50°	
	: -15°	+40°	
	: -15°	+40°	
2386			
25°			
13.5 - 13.8	25°		
33.0 A ()		
		I _{max}	
14.4 - 15.0	25°		
	25°	6-	*
6			



308.7±2.5	169.0±2.0	210.6±2.5	213.6±2.5
-----------	-----------	-----------	-----------

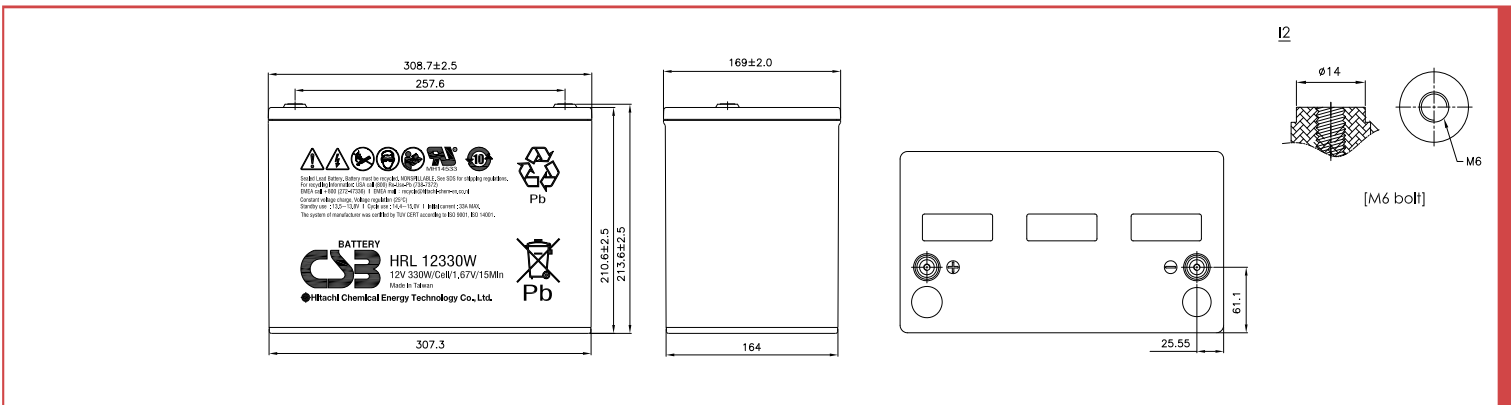

: A (25°)

U _K /T	2	4	5	6	8	10	15	20	30	45	60	90
1.60	530	444	409	373	317	271	202	162	119	86.0	68.4	49.6
1.67	482	405	369	341	293	256	196	158	117	85.1	67.9	49.4
1.70	454	382	350	326	280	248	191	155	116	84.4	67.5	49.3
1.75	405	340	317	293	257	230	181	149	112	82.6	66.4	48.9
1.80	337	294	273	257	230	206	168	139	106	79.1	64.1	47.7
1.85	252	243	234	219	196	180	150	125	97.1	73.2	59.9	45.1

: / (25°)

U _K /T	2	4	5	6	8	10	15	20	30	45	60	90
1.60	4597	4083	3930	3730	3221	2870	2187	1772	1318	972	784	578
1.67	4397	3951	3761	3474	3065	2737	2131	1738	1304	965	779	576
1.70	4285	3878	3597	3345	2983	2656	2093	1713	1292	958	775	575
1.75	4043	3550	3300	3109	2830	2485	2009	1656	1260	941	764	571
1.80	3660	3143	2993	2862	2515	2276	1883	1564	1204	907	742	559
1.85	2976	2795	2589	2432	2204	2042	1676	1416	1116	850	700	534