

# HRL 12540W<sub>12</sub> 540 /

HRL12540W -


20%



260	(10-12	20°		: 10 Eurobat)
12 (6	)			100%
540 /	15-		U	- 1.67 / 25°
43.9				
800A (5	)			
2.6				
		-15°	+50°	
		-15°	+40°	
		-15°	+40°	
3523				
25°				
13.5 - 13.8	25°			
54.0 A (				),
			I <sub>max</sub>	
14.4 - 15.0	25°			
	25°	6-		*
	6			



343.0±2.5	170.0±2.0	273.2±2.5	275.7±2.5
-----------	-----------	-----------	-----------

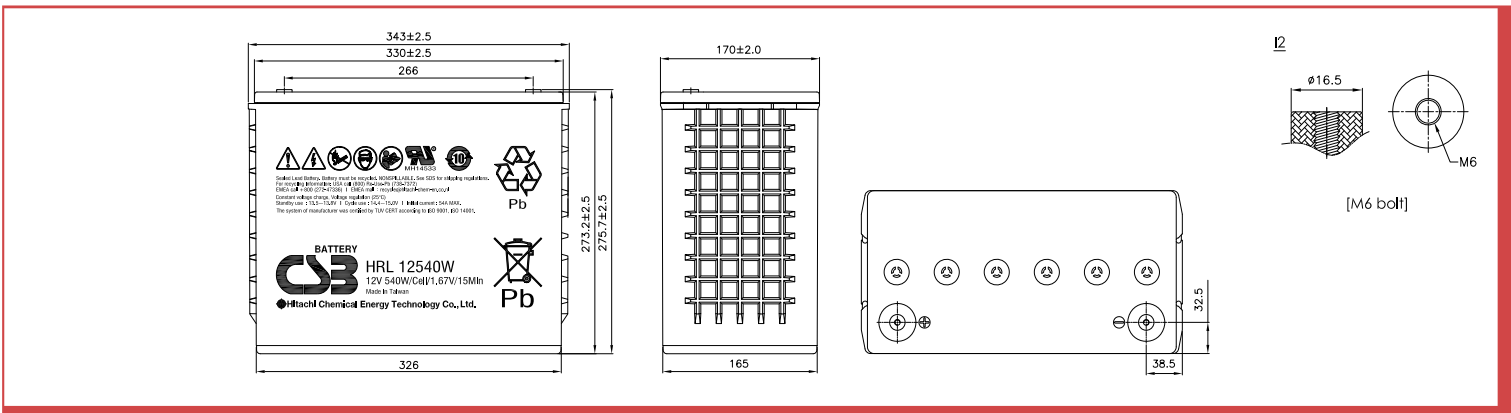

: A (25° )

U <sub>K</sub> /T	2	4	5	6	8	10	15	20	30	45	60	90
1.60	720	572	530	498	436	394	308	256	187	134	106	75.5
1.67	608	517	480	452	406	370	294	245	181	132	105	74.3
1.70	564	493	457	430	392	354	286	240	178	129	103	73.8
1.75	501	440	416	398	365	327	270	228	172	126	101	72.0
1.80	430	391	375	362	323	296	252	209	161	120	97.9	70.3
1.85	379	340	320	304	282	265	222	187	147	111	90.3	66.2

: / (25° )

U <sub>K</sub> /T	2	4	5	6	8	10	15	20	30	45	60	90
1.60	6874	5883	5483	5176	4688	4186	3421	2716	2057	1518	1224	885
1.67	6207	5325	5026	4794	4282	3885	3250	2630	2006	1492	1210	865
1.70	5768	4937	4717	4544	4016	3661	3097	2564	1988	1480	1201	863
1.75	5225	4639	4390	4196	3766	3472	2951	2454	1925	1441	1174	849
1.80	4561	4310	4032	3818	3442	3233	2723	2306	1846	1385	1129	824
1.85	4227	3643	3482	3356	3146	3010	2443	2104	1715	1295	1061	784