

HRL 1280W 12 80 /

HRL1280W -


20%



260	(6-9	20°		8 Eurobat)
12 (6)			100%
80 /	15-		U - 1.67 /	25°
6.8				
300A (5)			
9.4				
	-15°	+50°		
	-15°	+40°		
	-15°	+40°		
776				
25°				
13.5 - 13.8		25°		
8.0 A ()		I _{max}	
14.4 - 15.0		25°		
	25°	6-	*	
5				
ABS (-	-)	



181±2.0	76.2±1.0	167±2.0	167±2.0
---------	----------	---------	---------

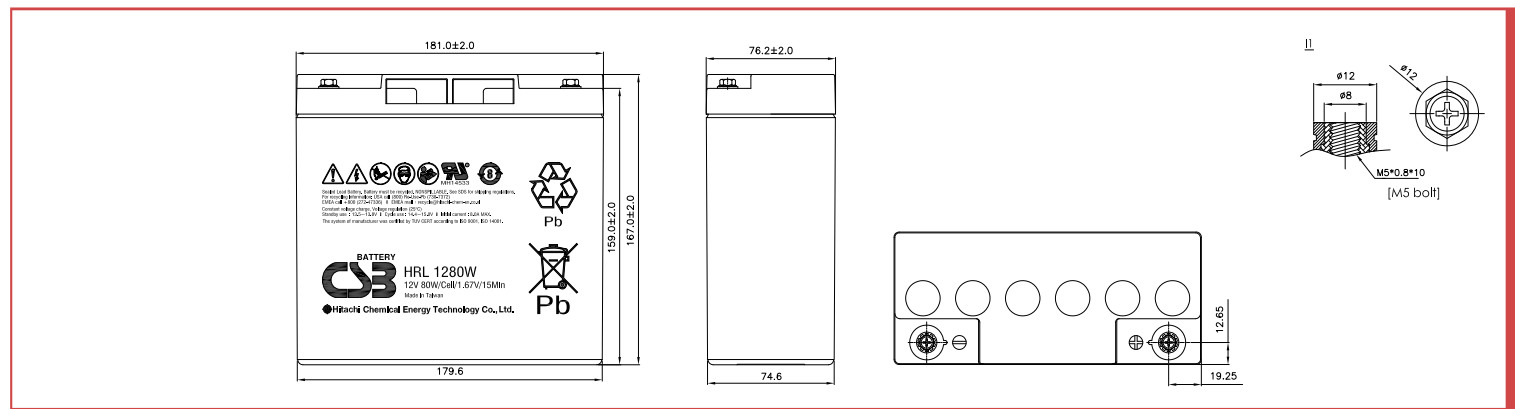

: A (25°)

U _k /T	2	4	5	6	8	10	15	20	30	45	60	90
1.60	165	113	98.4	87.9	72.3	62.4	44.4	35.0	24.9	18.2	14.6	10.6
1.67	142	103	90.7	81.7	69.5	58.7	43.5	34.0	24.6	18.0	14.4	10.4
1.70	133	98.6	88.3	80.7	67.8	58.1	42.4	33.7	24.3	17.7	14.2	10.2
1.75	119	92.3	82.6	75.5	64.3	54.3	41.6	32.9	23.7	17.4	14.0	10.1
1.80	105	83.2	75.7	70.0	60.8	51.8	39.8	32.1	23.0	16.9	13.6	10.0
1.85	92.3	76.6	70.1	65.2	56.8	49.2	37.6	30.1	22.1	16.6	13.50	9.84

: / (25°)

U _k /T	2	4	5	6	8	10	15	20	30	45	60	90
1.60	1584	1171	1047	955	790	691	496	391	282	209	169	122
1.67	1431	1073	971	895	761	661	485	382	280	207	167	121
1.70	1369	1045	953	884	743	660	475	381	275	204	165	118
1.75	1270	983	897	832	708	626	468	370	270	200	161	117
1.80	1173	909	836	781	679	593	453	364	266	197	159	116
1.85	1091	855	786	734	641	561	426	346	257	192	156	115