

HRL 634W 6 34 /

HRL634W -


20%



260	(6-9)	20°		8	Eurobat)
6 (3)			100%	
34 /	15-		U	- 1.67 /	25°
1.32					
130A (5)				
8.3					
	-15°	+50°			
	-15°	+40°			
	-15°	+40°			
380					
25°					
6.75 - 6.90	25°				
3.4 A (
7.2 - 7.5	25°				
	25°	6-		*	
F2-Faston Tab 250					
ABS (



150.9±2.0	34±1.0	94.3±1.0	98.6±1.5
-----------	--------	----------	----------

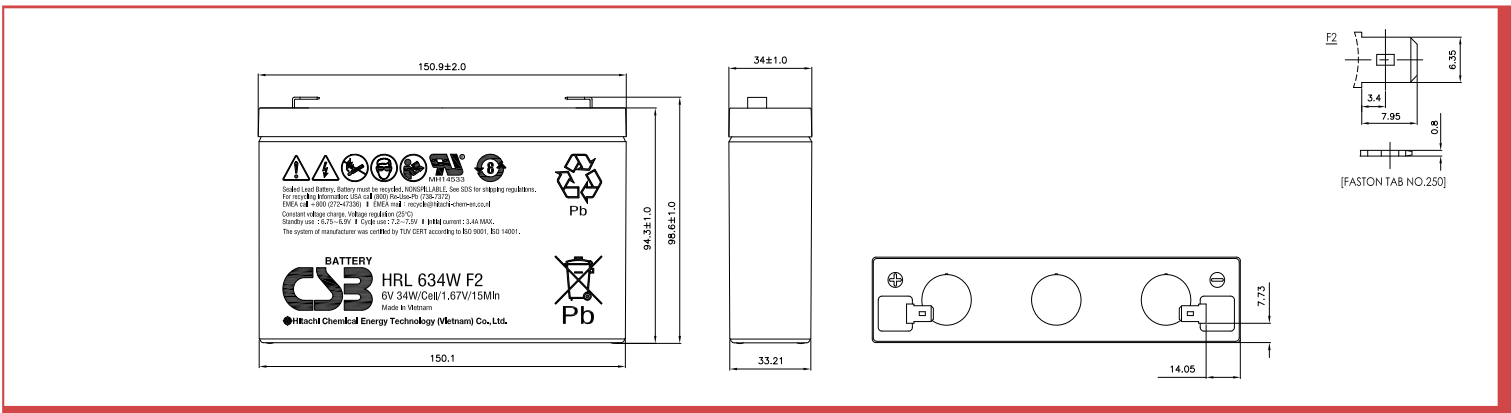

: A (25°)

U _k /T	2	4	5	6	8	10	15	20	30	45	60	90
1.60	60.4	47.4	41.7	37.6	30.9	26.6	18.7	14.4	10.3	7.39	5.84	4.66
1.67	56.5	44.4	39.2	35.4	29.3	25.2	18.6	14.3	10.2	7.33	5.80	4.63
1.70	54.9	43.1	37.9	34.2	28.6	24.6	18.5	14.2	10.1	7.29	5.78	4.62
1.75	51.9	40.7	35.8	32.3	27.0	23.8	18.3	14.1	10.0	7.23	5.74	4.57
1.80	48.9	37.9	33.7	30.6	25.8	23.0	18.1	13.9	9.94	7.17	5.69	4.52
1.85	45.4	35.1	31.4	28.6	24.6	22.0	17.9	13.8	9.84	7.11	5.65	4.47

: / (25°)

U _k /T	2	4	5	6	8	10	15	20	30	45	60	90
1.60	327	260	231	209	175	150	110	84.0	60.7	43.7	34.6	27.7
1.67	312	246	218	197	167	143	109	82.6	60.3	43.5	34.5	27.6
1.70	305	240	212	192	163	140	108	82.0	59.7	43.2	34.4	27.5
1.75	292	228	202	183	155	135	104	81.0	59.3	43.0	34.2	27.3
1.80	278	215	191	173	147	129	100	80.0	58.9	42.6	33.9	27.1
1.85	265	203	181	164	139	123	96.0	79.0	58.1	42.2	33.7	26.9